



## IN-LINE FAN KITS - SF Shower Fan Models



### GENERAL INFORMATION

Models	Grille Cut-Out	Interior Grille	Exterior Grille	Duct Type	Length of Duct included
SF100	115mm	White Eggcrate	White Fixed Louvre	Flexible Alum.	3m supplied (should not be extended)
SF200	115mm	White Eggcrate	White Fixed Louvre	Flexible Alum.	3m supplied (can be extended up to 6m)
SF125	140mm	White Eggcrate	White Fixed Louvre	Flexible PVC	4m supplied (should not be extended)
SF150	160mm	White Eggcrate	White Fixed Louvre	Flexible PVC	5m supplied (can be extended up to 12m)

**Please note:** Grille cut out size is a nominal diameter for a circular cut-out





### DIMENSION INFORMATION

Models	A	B	C	D	E
SF100	130	155	90	100	27
SF200	155	100	100	195	258
SF125	150	155	99	118	27
SF150	187	153	109	150	27

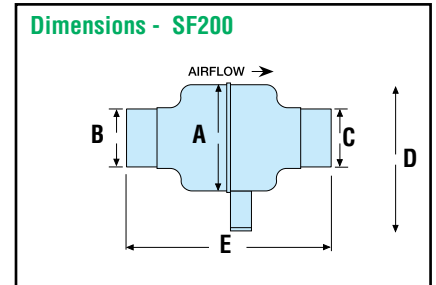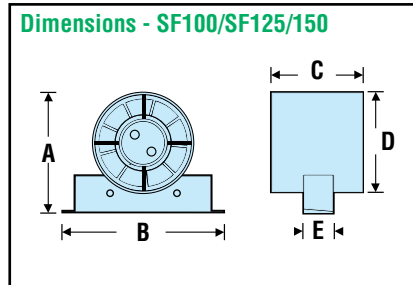

### TECHNICAL SPECIFICATION

Models	SF100	SF200	SF125	SF150
Fan	ID100	CFD200	ID125	ID150
Power	220 - 240V	220 - 240V	220 - 240V	220 - 240V
Fan Performance	23l/s, 85m <sup>3</sup> /hr	31l/s, 110m <sup>3</sup> /hr	36l/s, 130m <sup>3</sup> /hr	87l/s, 313m <sup>3</sup> /hr
Fan Wattage	20W	20W	20W	25W
Maximum Pressure	20Pa	120Pa	35Pa	60Pa
Fan Speed	2400 rpm	1400 rpm	2000rpm	2400 rpm
Sound Level	41 dB(A)	45 dB(A)	41 dB(A)	40 dB(A)
Max Operating Temp	50°C	50°C	50°C	50°C
IP Rating	IPX4	IPX4	IPX4	IPX4

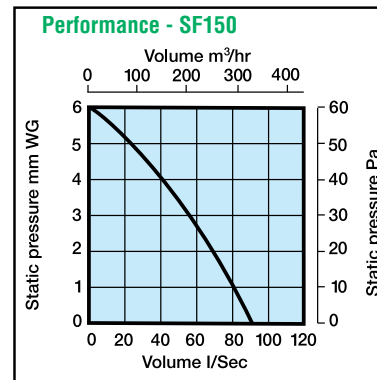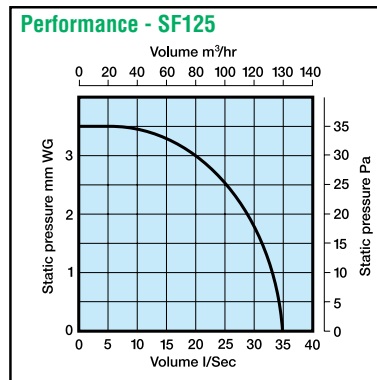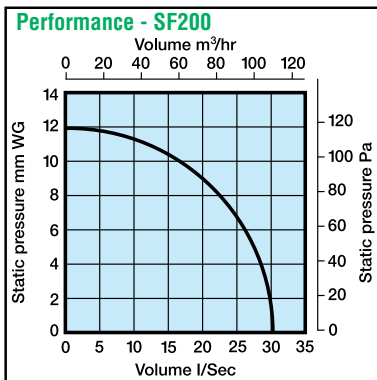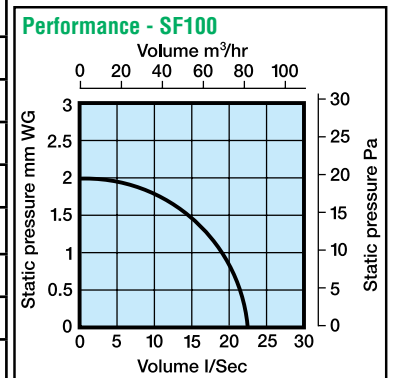

**Note: PERFORMANCE - ID Fans** maximum fan performance stated, this can vary depending on the length of ducting used.