



## IN-LINE FAN KITS - SFLP Shower Fan Low Profile Models



### GENERAL INFORMATION

Models	Grille Cut-Out	Interior Grille	Exterior Grille	Duct Type	Length of Duct included
SFLP125	140mm	White Low Profile	White Low Profile	Flexible Aluminium	4m supplied (can be extended up to 6m)
SFLP150	160mm	White Low Profile	White Low Profile	Flexible PVC	5m supplied (can be extended up to 12m)

**Please note:** Grille cut out size is a nominal diameter for a circular cut-out

### DIMENSION INFORMATION

Models	A	B	C	D	E
SFLP125	155	125	125	195	258
SFLP150	200	143	170	185	-

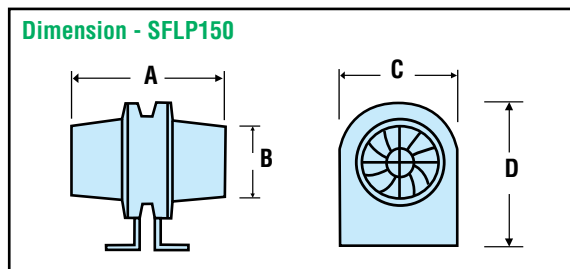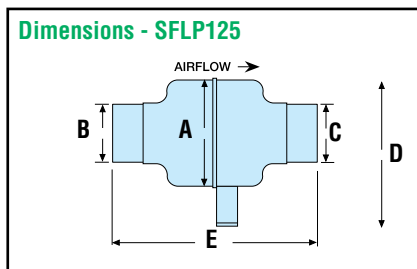

### TECHNICAL SPECIFICATION

Models	SFLP125	SFLP150
Fan	CFD225	WhisperVent
Power	220 - 240V	220 - 240V
Fan Performance	39l/s, 140m <sup>3</sup> /hr	94l/s, 340m <sup>3</sup> /hr
Fan Wattage	20W	46W
Maximum Pressure	120Pa	160Pa
Fan Speed	1400 rpm	2750 rpm
Sound Level	45 dB(A)	38 dB(A)
Max. Operating Temp	50°C	80°C
IP Rating	IPX4	IPX2

