



Technical Data

WALL/CEILING & THRU WALL- Commercial XF/XP Models



GENERAL INFORMATION

Models	Fan Cut-Out Size	Exterior Grille	Duct Type	Duct Length
XFS230	265mm	-	-	-
XFS300	310mm	-	-	-
XPS230	265mm	White Fixed Grille	Aluminium Semi-Rigid	375mm
XPS300	310mm	White Fixed Grille	Aluminium Semi-Rigid	375mm

Please note: Fan cut out size is a nominal diameter for a circular cut-out

DIMENSION INFORMATION

Models	A	B	C	D	E	F	G	H	I
XFS230	286	230	141	75	66	-	-	-	-
XFS300	362	300	156	81	75	-	-	-	-
XPS230	286	230	141	75	286	250	375	248	30
XPS300	362	300	156	81	350	230	375	298	50

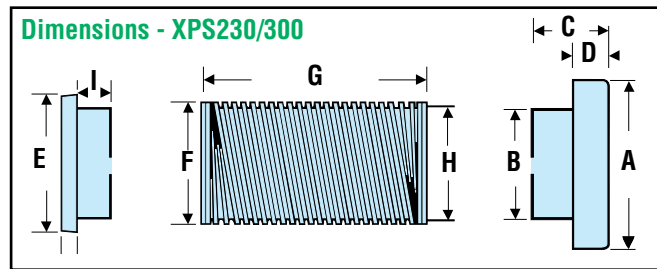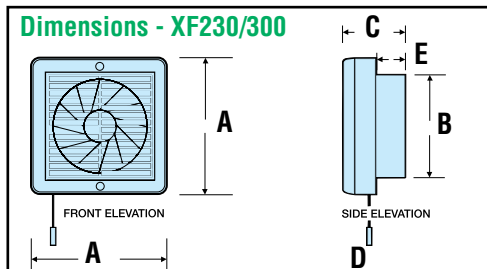

TECHNICAL SPECIFICATION

Models	XFS230	XFS300	XPS230	XPS300
Power	220 - 240V	220 - 240V	220 - 240V	220 - 240V
Fan Performance	152l/s, 550m ³ /hr	306l/s, 1100m ³ /hr	152l/s, 550m ³ /hr	306l/s, 1100m ³ /hr
Fan Wattage	45W	82W	45W	82W
Maximum Pressure	50Pa	60Pa	50Pa	60Pa
Fan Speed	1250 rpm	1300 rpm	1250 rpm	1300 rpm
Sound Level	50 dB(A)	60 dB(A)	50 dB(A)	60 dB(A)
Max. Operating Temp	50°C	50°C	50°C	50°C
IP Rating	IPX4	IPX4	IPX4	IPX4

